

6260097

514882

FIG_1

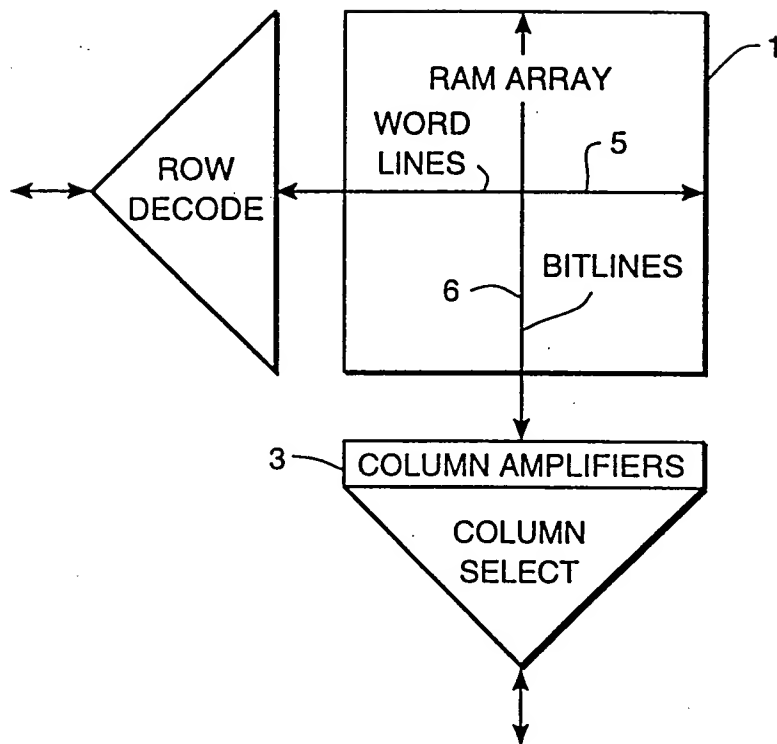


FIG. 2


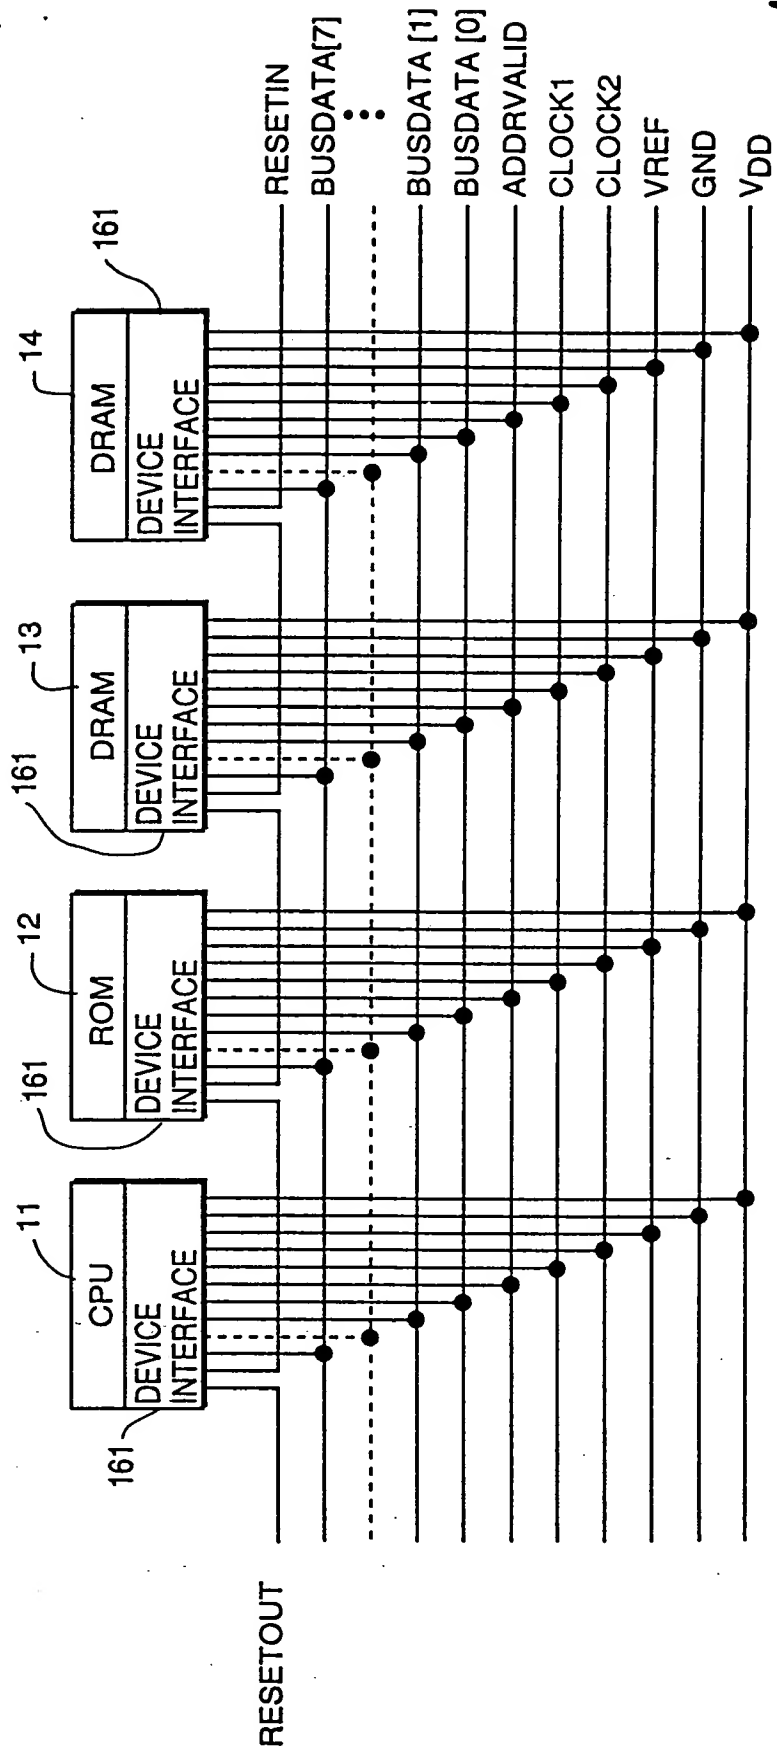


FIG 3

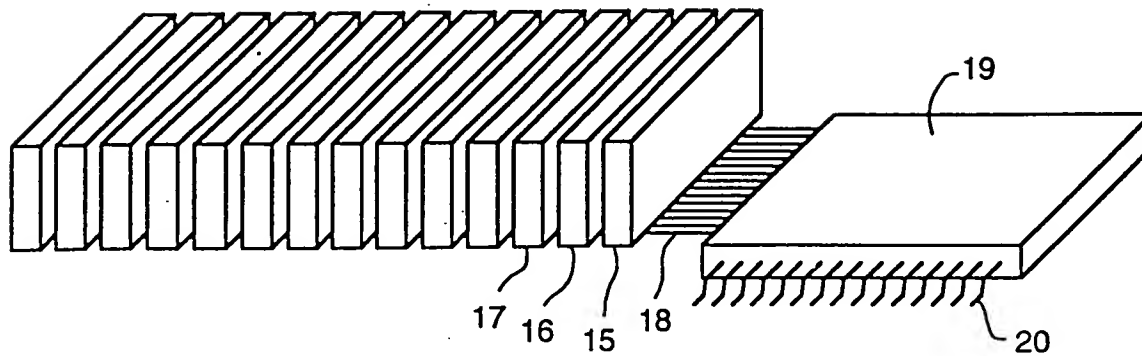

REGULAR ACCESS

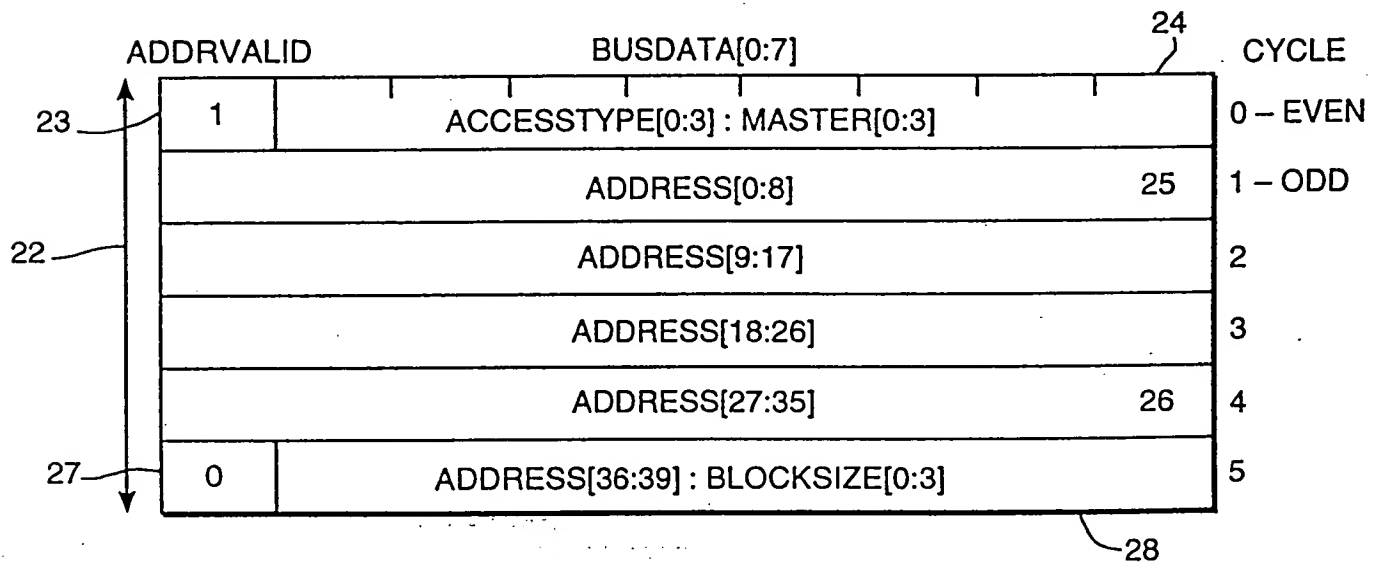


FIG 4

REJECT (NACK) CONTROL PACKET

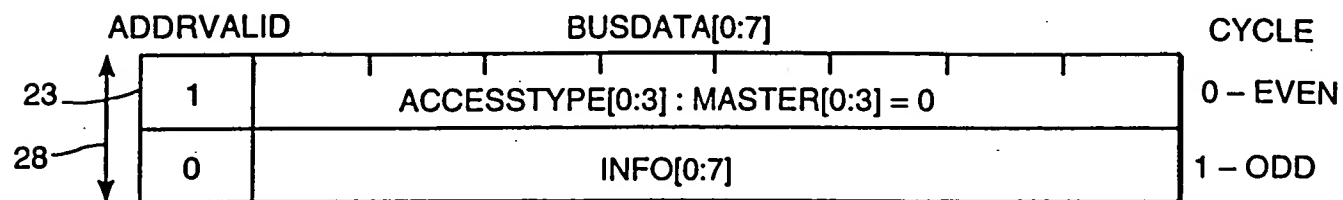


FIG 5

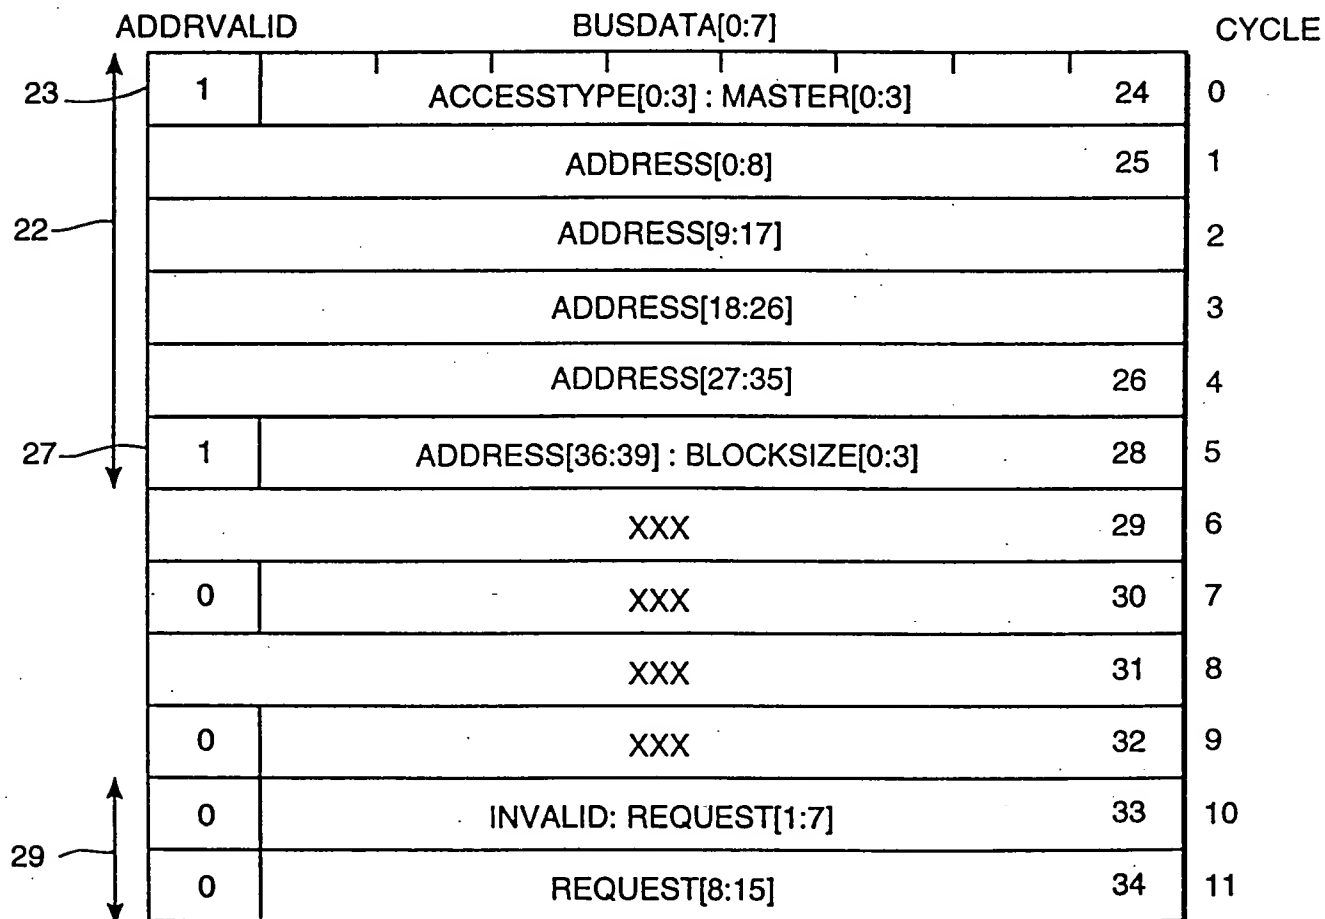


FIG 6

514872

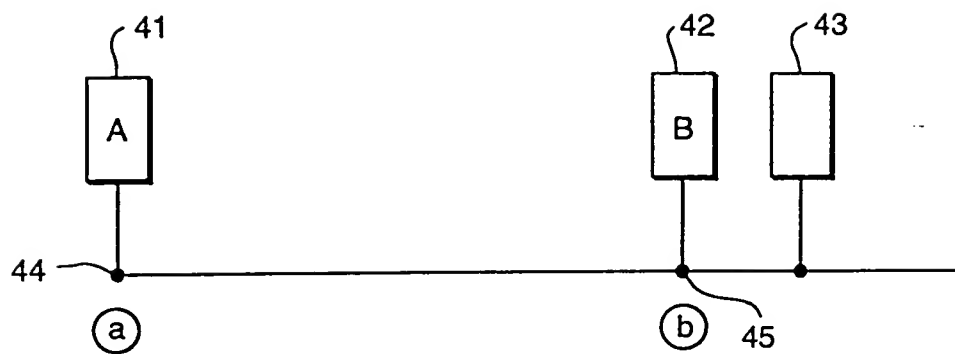


FIG 7A

314872

VOLTAGE LOGICAL
VALUE

2 0

V(a)
AT 44

1.5

1


1

>1

0

V(b)
AT 45

1

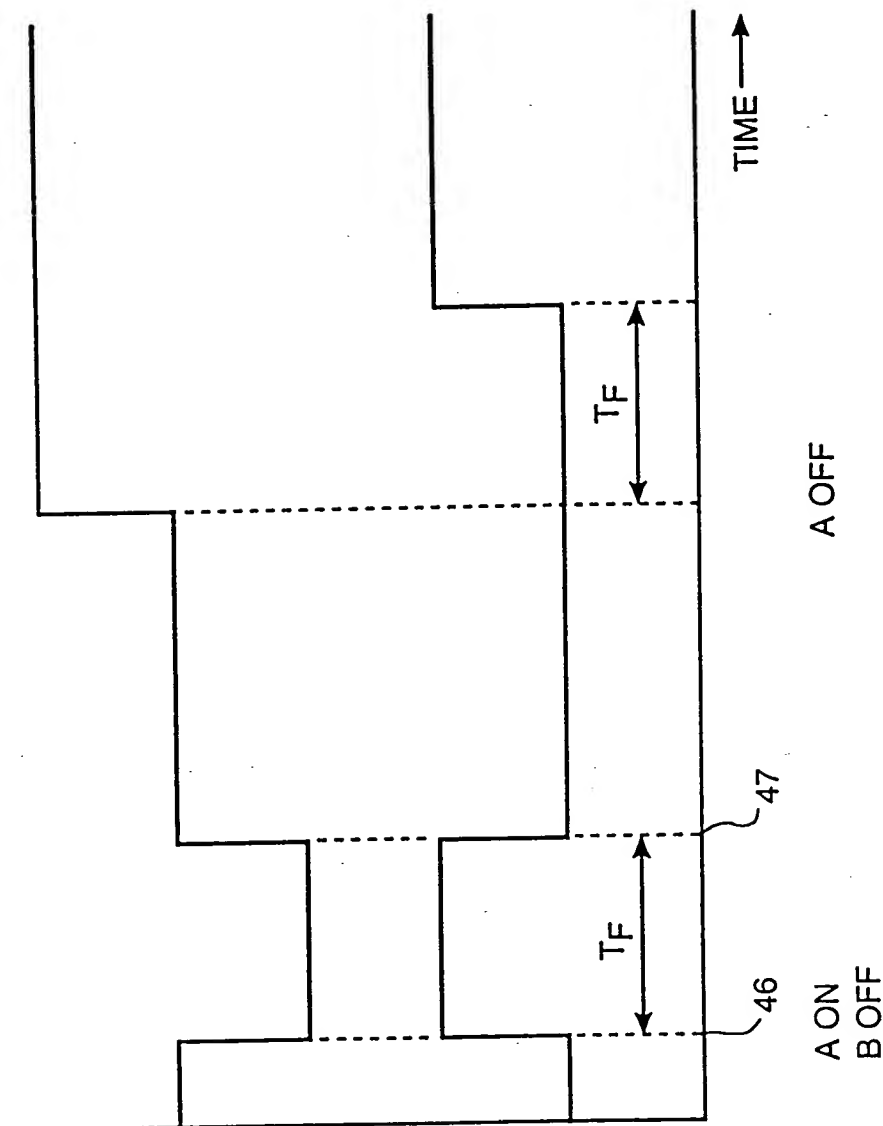

A OFF

A ON
BOFF

FILE 7B

514872

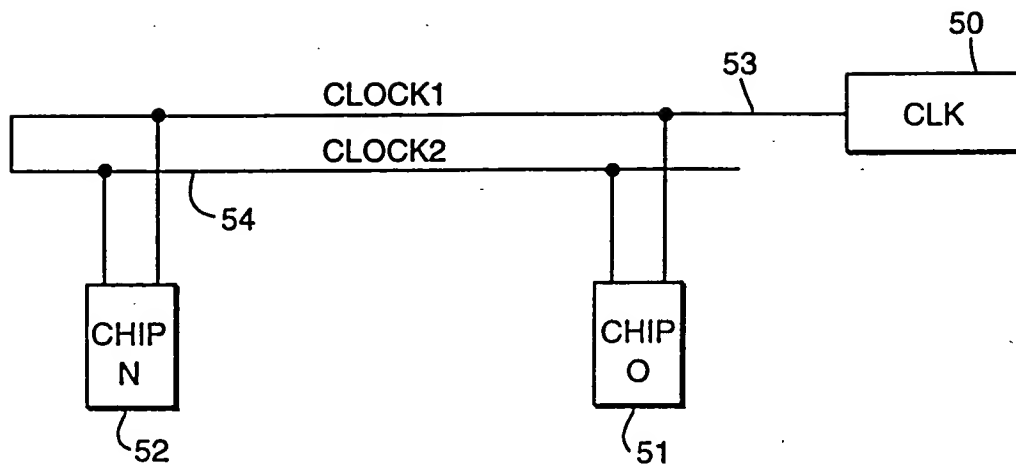


FIG. 8A


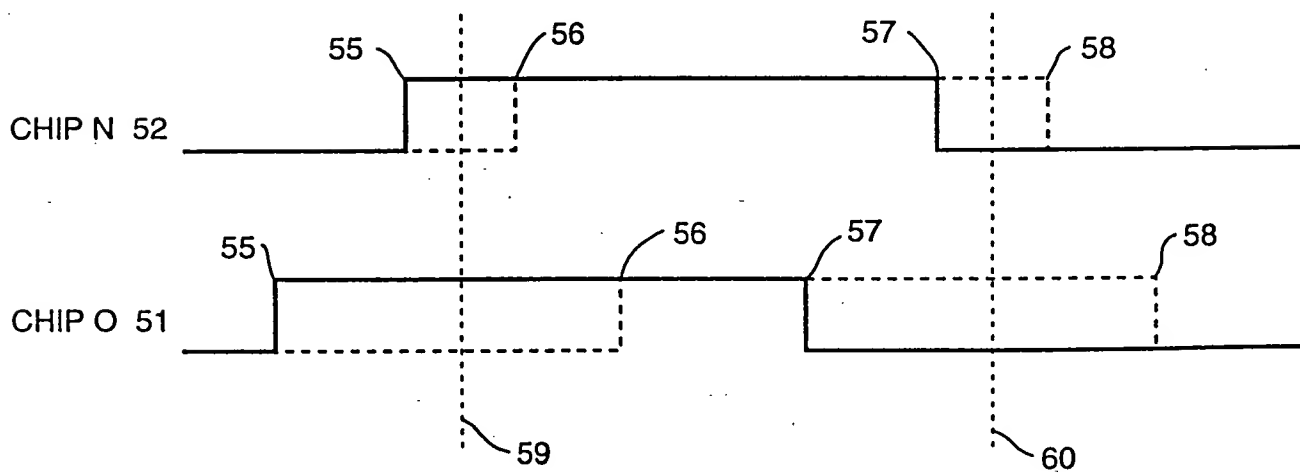


FIG. 8B

514872

FIG. 9

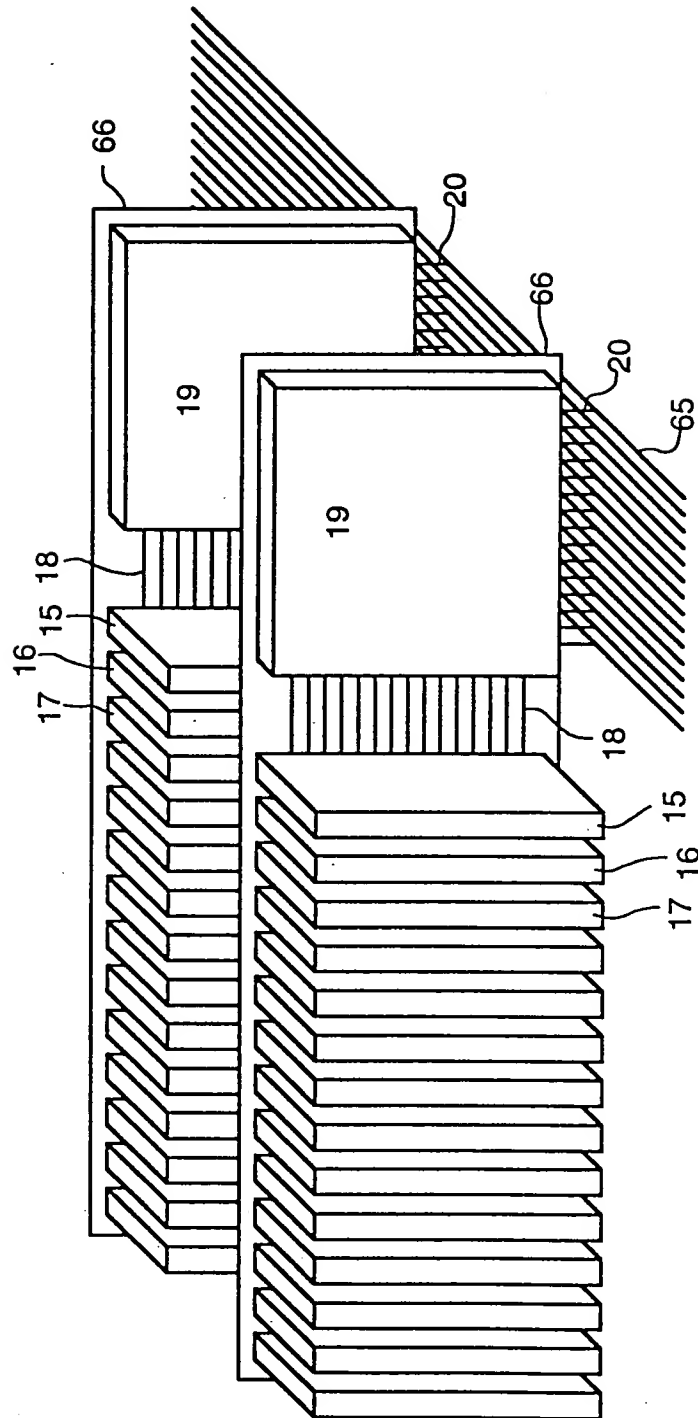

314872


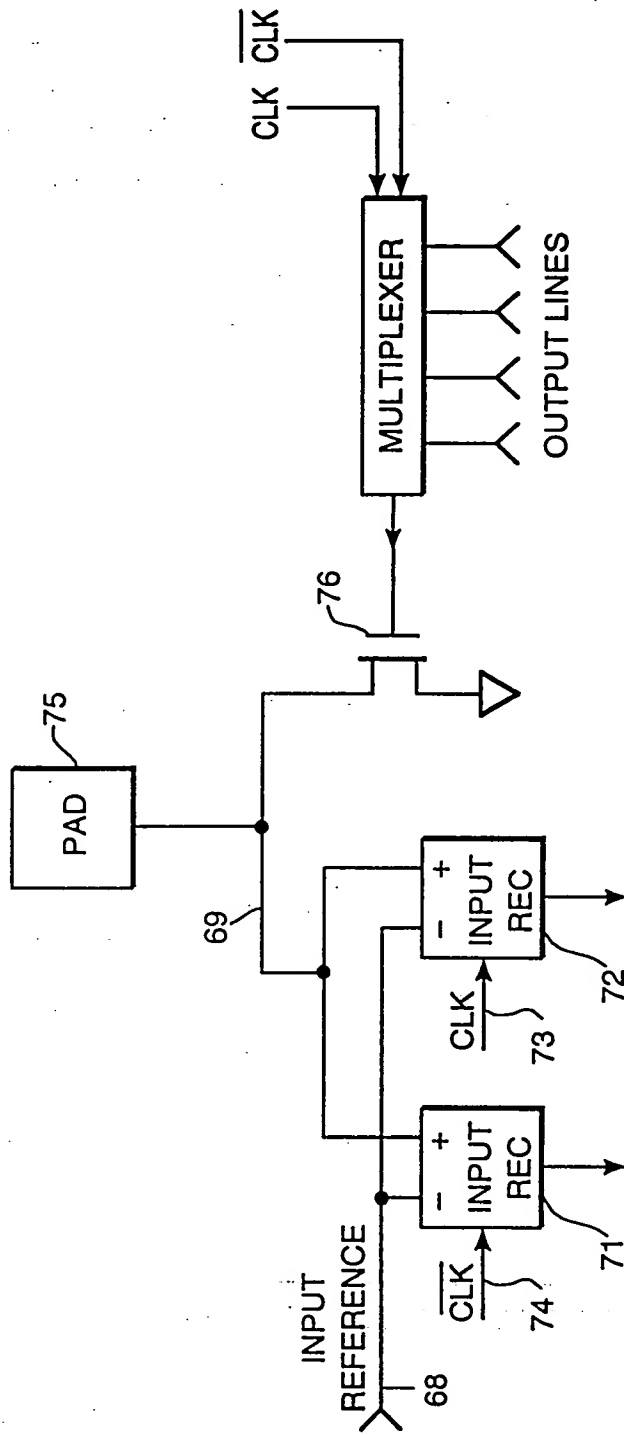



FIG. 10


514872

FIG. 11

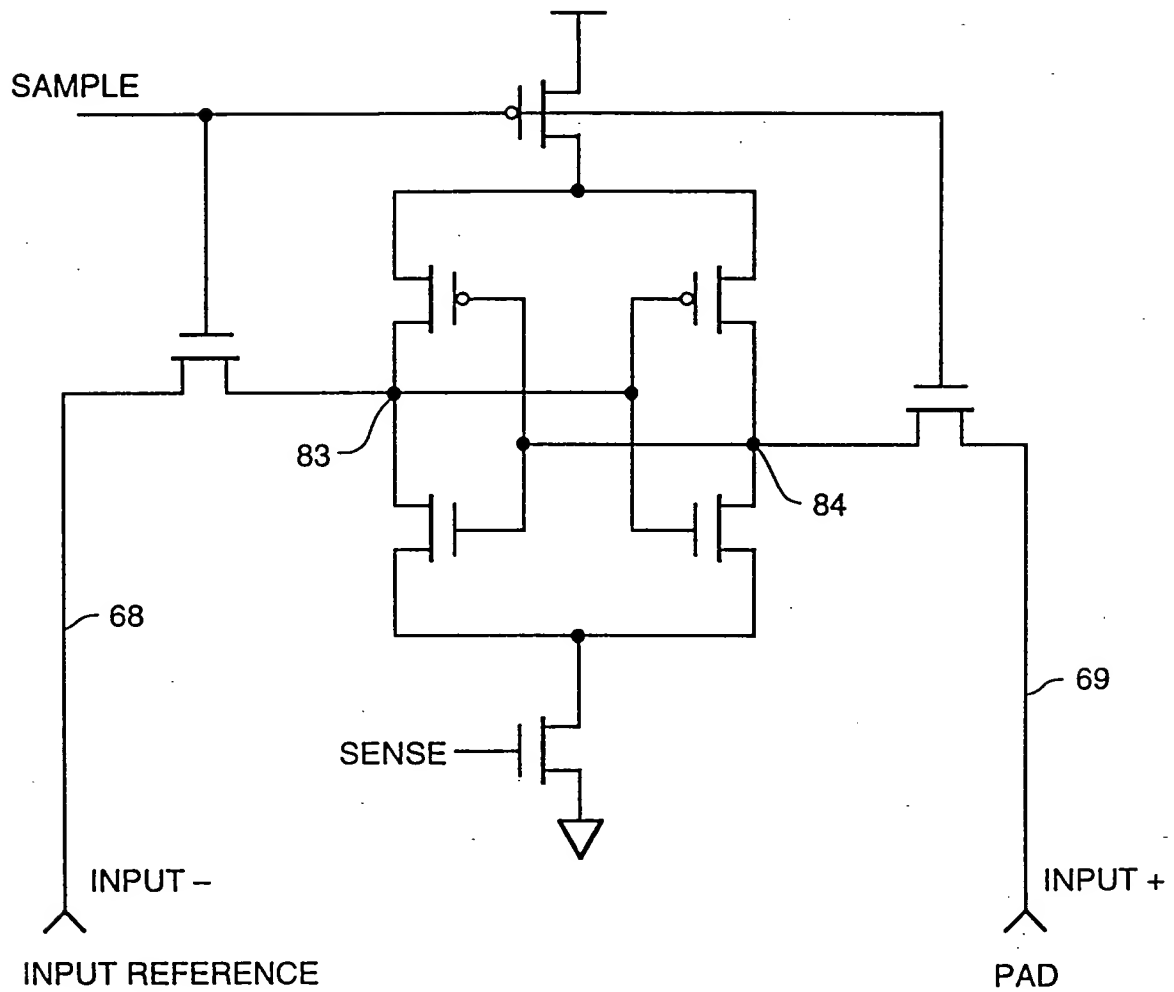

NEHEMIAH

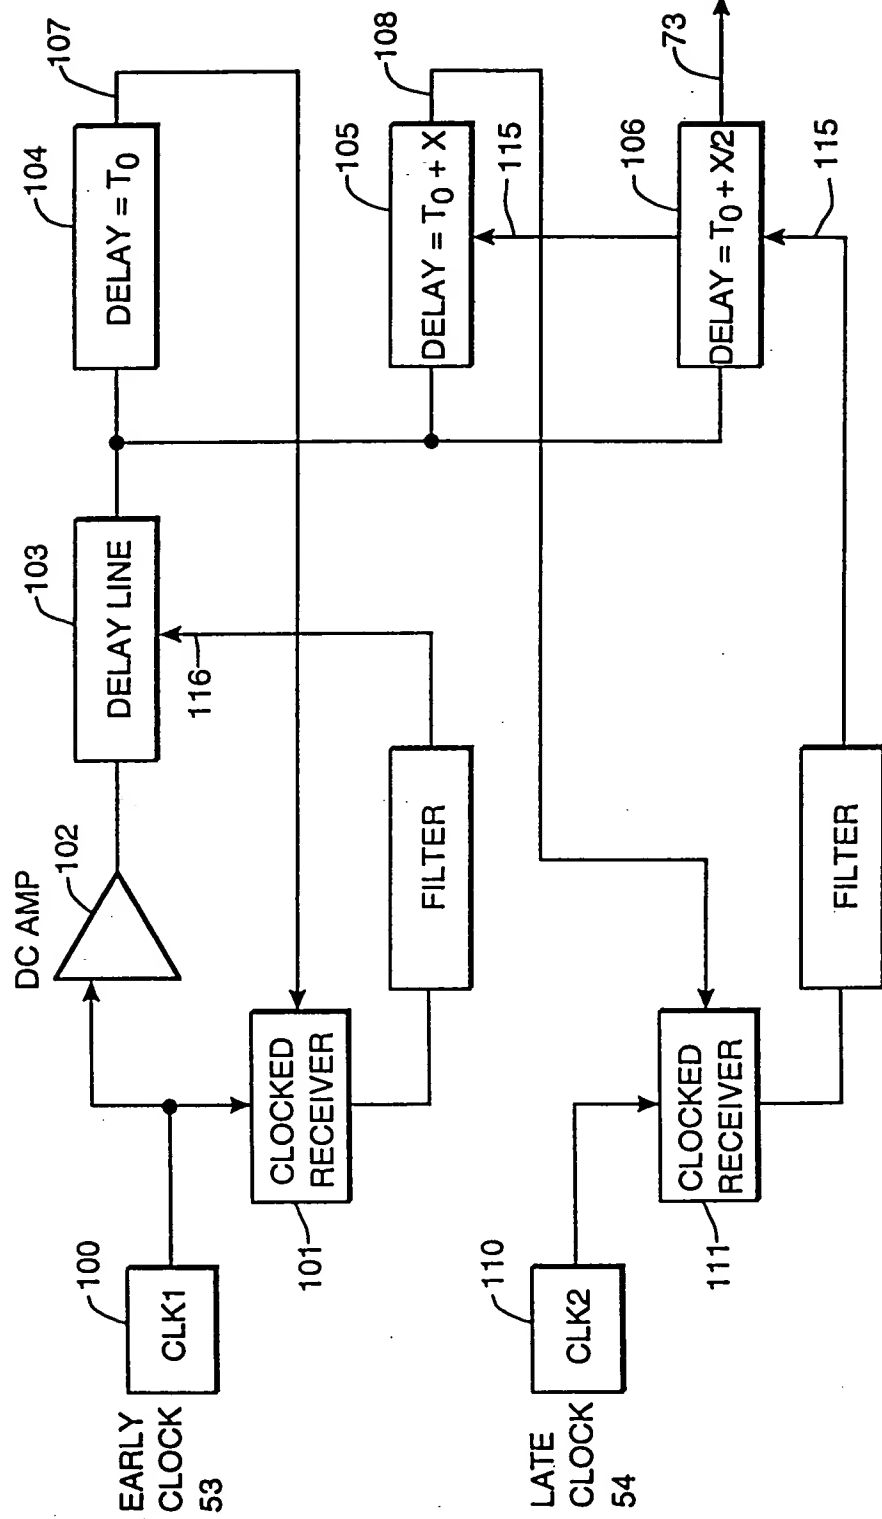

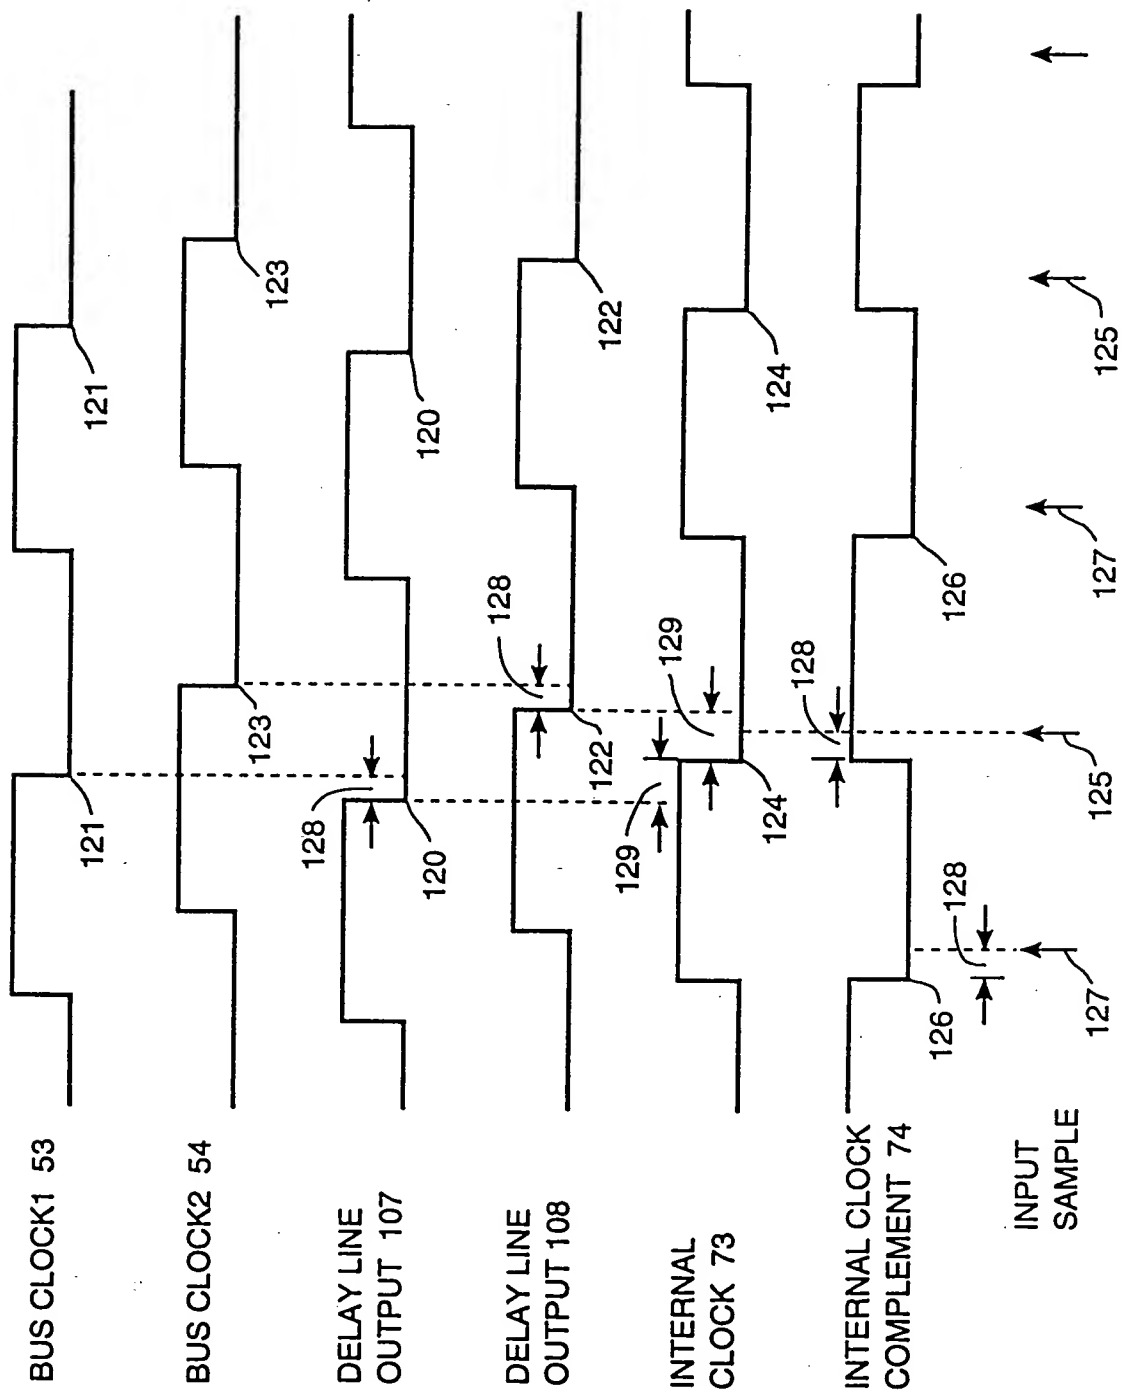

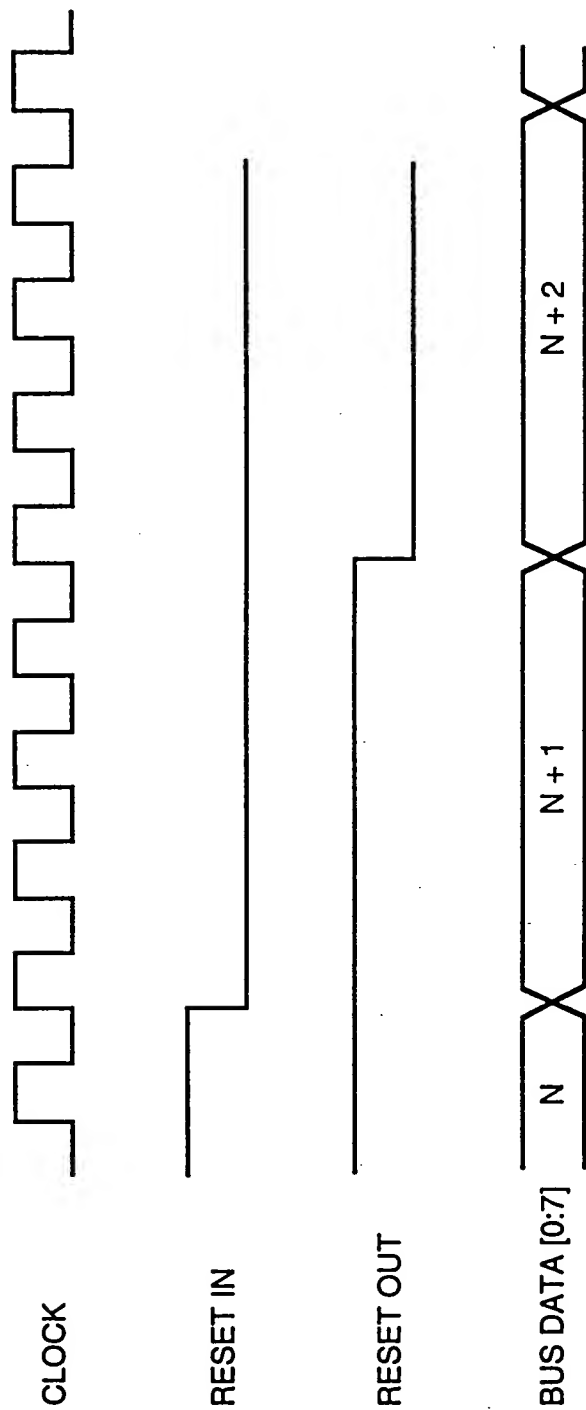


FIG 14

872

FIG 15

3 1 8 7 2

